

GAVMANAK.COM

0414-622-007

Intrinsically Safe Permissible Dual-Light

Flashlight



Floodlight




Dual-Light



These non-rechargeable dual-lights are cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. They each use a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. An 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switch provides momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Power comes from 3 AA premium batteries (not included).

INTRINSICALLY SAFE



120 Flashlight
Lumens

120 Floodlight
Lumens

- 17.5 hours run-time
- Engineered polymer housing
- 170 meter beam distance



XPP-5422G

XPP-5422B




XPP 5420 series



High-efficiency deep parabolic reflector

Intrinsically Safe Permissible Dual-Light

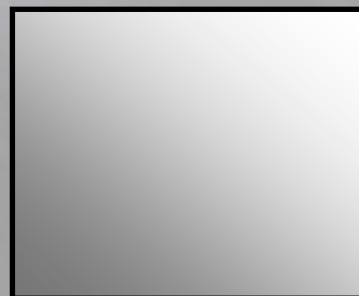

FEATURES

- Flashlight – floodlight – dual-light
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-light (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty*

SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present

Patent 7,738,229



Built in pocket/belt clip

Dual body switches

Wide-beam floodlight

<p>CLASS I DIV 1 GRPS A-D T3 CLASS II & III GRPS E-G T135C CLASS I ZONE 0 Ex ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Go I M1 Ex ia Ma II 1 G Ex ia IIC T3 Go</p> <p>Bayco Products, Inc.</p> <p>Permissible Nightstick 5422 Flashlight/Floodlight</p> <p>APPROVAL No. 20-A130001-0</p> <p>TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY</p>	<p>Ex ia I Ma Ex ia IIC T3 Ga Intertek ITS 13 ATEX27837 IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C I-SV/Cell AA Alkaline CE</p>	<p>Conforms to: ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 Certified to: CAN/CSA STD C22.2 NO 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25</p>



Model	URC 0 17398
XPP-5422G	80093 8
XPP-5422B	80094 5

GAVMANAK.COM

0414-622-007