

3AA

INTRANT™ DUAL-LIGHT™ ANGLE LIGHT



**GAVMANAK**  
0414-622-007

**NIGHTSTICK**®  
*Life Depends on Light™*



HEAD ROTATES 90°

EXCLUSIVE 45°  
DOWNWARD FLOODLIGHT



Head rotates 90° – directing beam exactly where it's needed most



45° downward floodlight lights an 8 foot walking area




Easy-to-use with gloves, the large switches **independently control** separate LEDs



Heavy-duty, clip and V-ring **securely holds tight to gear** in any situation



FL1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	110 LUMENS	60 LUMENS
	11h	18h	33h
	420m	250m	187m
	38000cd	15625cd	8750cd



AVAILABLE IN MULTIPLE COLORS.



**200 LUMENS**

**GAVMANAK**  
0414-622-007

**INTRANT™**

# DUAL-LIGHT™ ANGLE LIGHT

**3AA**



**ITEM NUMBER/UPC**

XPP-5566RX (Red), 0 17398 80629 9  
 XPP-5566GX (Green), 0 17398 80628 2

**MARKET APPLICATIONS**

Hazardous work environments, fire, rescue, industrial and automotive

**CASE MATERIAL**

- Glass filled nylon polymer

**LUMENS/RUNTIME**

**FLASHLIGHT**  
 - HIGH: 200L, 11 hrs. runtime  
 - MEDIUM: 110L, 18 hrs. runtime  
 - LOW: 60L, 33 hrs. runtime  
 - STROBE

**FLOODLIGHT**

- HIGH: 100L, 11 hrs. runtime  
 - MEDIUM: 40L, 18 hrs. runtime  
 - SURVIVAL: 20L, 33 hrs. runtime

**DUAL-LIGHT**

- 205L, 11 hrs. runtime

**CANDELA**

**FLASHLIGHT**  
 - HIGH: 38,000  
 - MEDIUM: 15,625  
 - LOW: 8,750

**BEAM DISTANCE**

**FLASHLIGHT**  
 - HIGH: 420m  
 - MEDIUM: 250m  
 - LOW: 187m

**WATER RATING**

- IP-67 (dustproof and waterproof)

**DROP RATING**

- 2 meters

**DIMENSIONS**

- LENGTH: 6.6 in (168mm)  
 - WIDTH: 2.6 in (66mm)  
 - DEPTH: 2.6 in (66mm)  
 - BEZEL DIAMETER: 2.1 in (53mm)  
 - WEIGHT: 11.1 oz (315g)(with batteries)

**BATTERY**

- 3AA batteries (included)

**WARRANTY**


- Limited Lifetime Warranty

**WHAT'S INCLUDED**


- Angle light  
 - AA battery carrier  
 - 3AA batteries  
 - Instruction manual



FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>200 LUMENS</b>	<b>110 LUMENS</b>	<b>60 LUMENS</b>
	<b>11h</b>	<b>18h</b>	<b>33h</b>
	<b>420m</b>	<b>250m</b>	<b>187m</b>
	<b>38000cd</b>	<b>15625cd</b>	<b>8750cd</b>



XPP-5566 PERFORMANCE CURVE

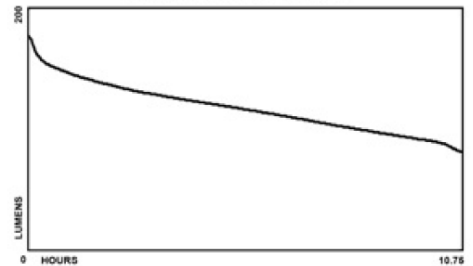

Bayco Products, Inc. XPP-5566



E 114304  
 ID 4003544  
 ELECTRICAL SAFETY  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS  
 For use with Bayco Li-Ion Battery Pack 5566-BATT or  
 5566-CARRIER with 3 AA Energizer Type EN91 or E91  
 batteries only

CLASS I DIV 1 GRPS A-D T3  
 CLASS II & III DIV1 GRPS E-G T135°C  
 CLASS I ZONE 0 AEx ia IIC T3 Ga

Ex ia op is I Ma  
 Ex ia op is IIC T3 Ga  
 DEMKO 17 ATEX 1927  
 IECEx UL 17 0082  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell Alkaline  
 3.7V/Cell Li-Ion  
 IP-67  
 Um: 10V



Control Drawing: 5566-CERT-DWG1-03



AVAILABLE IN MULTIPLE COLORS.



**GAVMANAK**  
**0414-622-007**